Aspicath Aspiration Catheter

Biometrix Aspiration Catheters provide the best solution for thrombus removal



Aspicath Aspiration Catheter

The Biometrix Aspiration Catheter incorporates a smooth tip design to increase pushability and a unique hydrophilic coating to escalate trackability. The Aspicath's excellent pushability is also due to the innovative shaft design and the kink resistance, specifically designed for aspiration catheters.

Code

BG-A6F-ASPICATH

RG-A7F-ASPICATH




Be AM ASHEATT	71 Aspiration catheter	
Technical Data	Aspicath 6F	Aspicath 7F
Range	6F	7F
Wire compatibility	0.014" (0.36mm)	0.014" (0.36mm)
Working length	145cm	145cm
Distal part flexibility/trackability	Pebax flexibility	Pebax flexibility
Proximal part push/kinking resistance	Reinforced PEEK for support	Reinforced PEEK for support
Outer diameter (O.D.)	0.067" (1.70mm)	0.078″ (1.98mm)
Extraction lumen area (Proximal)	0.95mm ²	1.54mm ²
Extraction lumen area (Distal)	0.93mm ²	1.43mm ²
Aspiration speed	1.6cc/s.	2.8cc/s.

Description

6F Aspiration Catheter

7F Aspiration Catheter

Aspiration Catheter Set

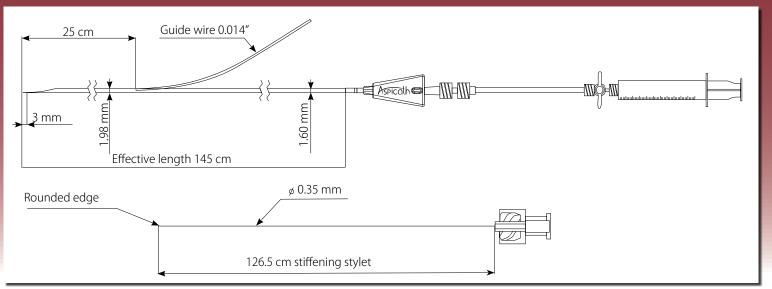



Overbroek 10 6247 EN Gronsveld, The Netherlands Tel: +31 (0)43 204 1010 | Fax: +31 (0)43 204 1012 sales@biometrixmedical.com | www.biometrixmedical.com